
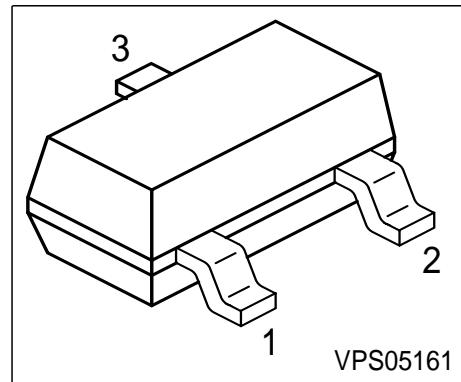


## NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in resistor ( $R_1=4.7\text{k}\Omega$ )



Type	Marking	Pin Configuration			Package
BCR119	WKS	1 = B	2 = E	3 = C	SOT23

### Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	50	V
Collector-base voltage	$V_{CBO}$	50	
Emitter-base voltage	$V_{EBO}$	5	
Input on Voltage	$V_{i(on)}$	15	
DC collector current	$I_E$	100	mA
Total power dissipation, $T_S = 102^\circ\text{C}$	$P_{tot}$	200	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-65 ... 150	

### Thermal Resistance

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	$\leq 240$	K/W
--	------------	------------	-----

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A=25^\circ\text{C}$ , unless otherwise specified


<b>Parameter</b>	<b>Symbol</b>	<b>Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_E = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_E = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
DC current gain 1) $I_E = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{\text{FE}}$	120	-	630	-
Collector-emitter saturation voltage1) $I_E = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.3	V
Input off voltage $I_E = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0.4	-	0.8	
Input on Voltage $I_E = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(\text{on})}$	0.5	-	1.1	
Input resistor	$R_1$	3.2	4.7	6.2	kΩ

**AC Characteristics**


Transition frequency $I_E = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	3	-	pF

1) Pulse test:  $t < 300 \mu\text{s}$ ;  $D < 2\%$


**DC Current Gain**  $h_{FE} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

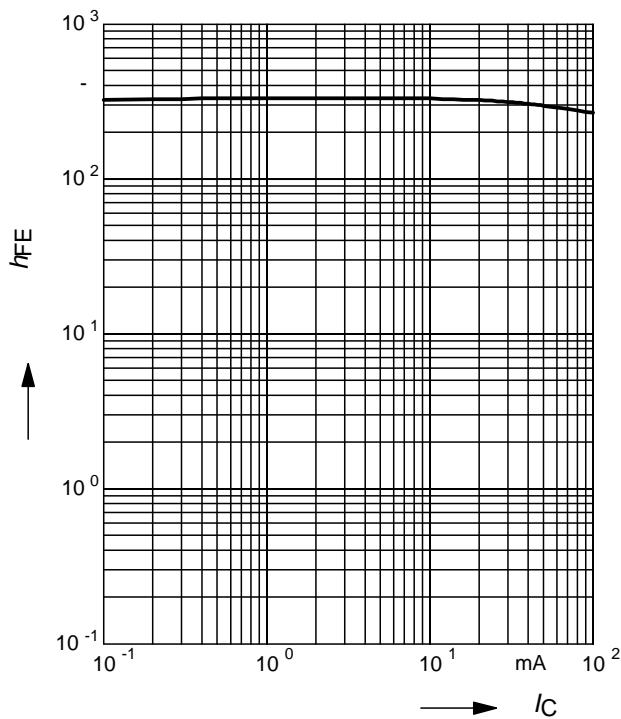


**Input on Voltage**  $V_{i(on)} = f(I_C)$   
 $V_{CE} = 0.3V$  (common emitter configuration)

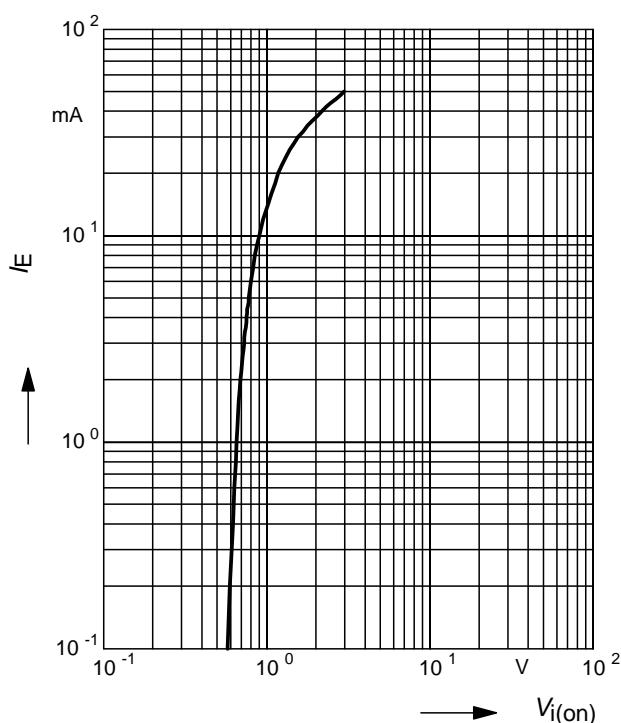


**Collector-Emitter Saturation Voltage**  
 $V_{CEsat} = f(I_C)$ ,  $h_{FE} = 20$

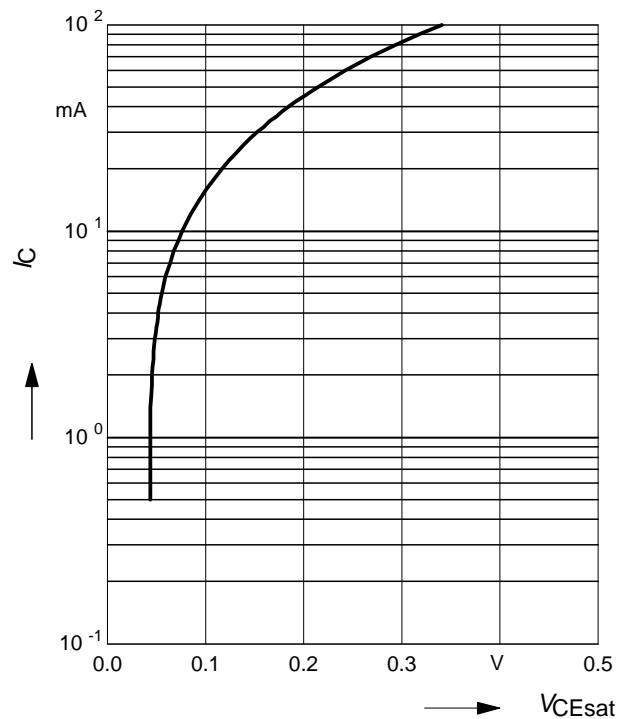


**Input off voltage**  $V_{i(off)} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

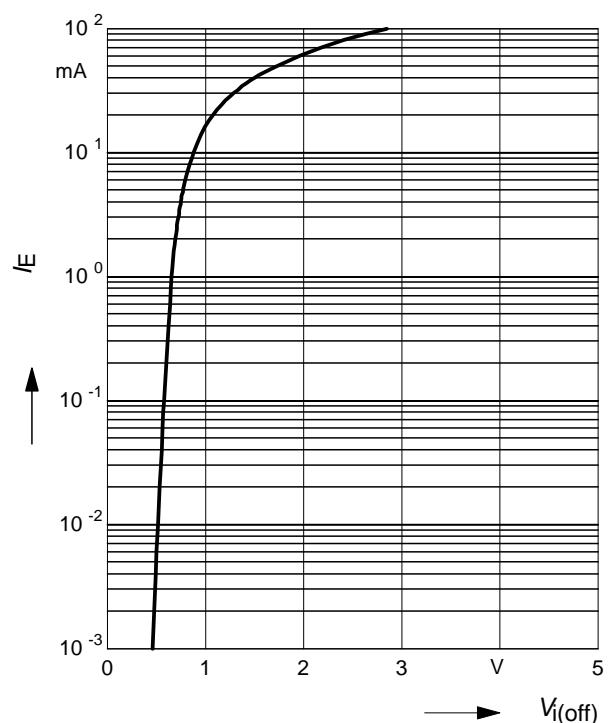

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

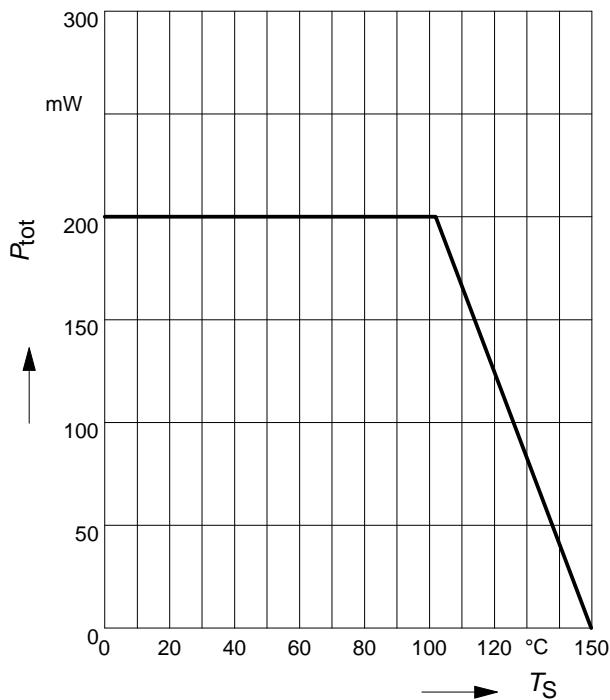

**Permissible Pulse Load  $R_{\text{thJS}} = f(t_p)$**

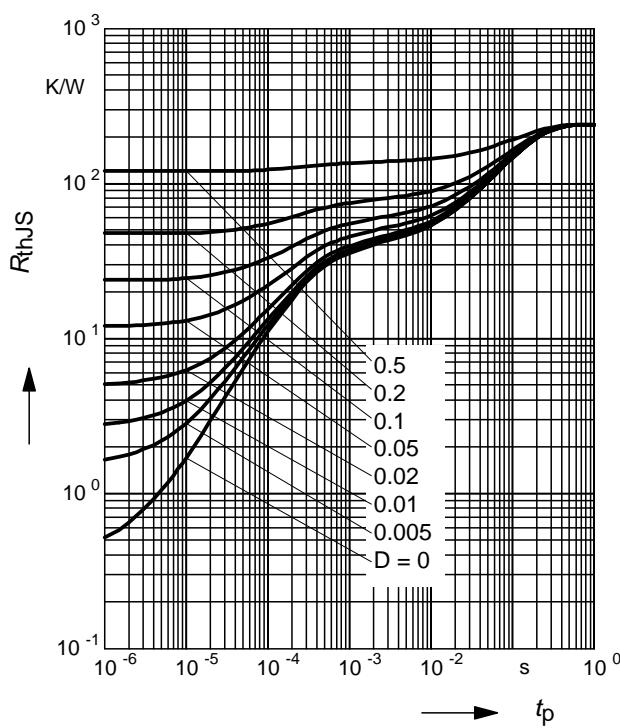

**Permissible Pulse Load**

$$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$$

