

RF AMPLIFIER

MODEL *TM6176*

Available as: TM6176, 4 Pin TO-8 (T4)
 TN6176, 4 Pin Surface Mount (SM3)
 FP6176, 4 Pin Flatpack (FP4)
 BX6176, Connectorized Housing (H1)

Features

- Medium Noise Figure: <4 dB Typical
- Medium Output Power: +14 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +46 (Typ.)
 Second Order Two Tone Intercept Point +40 (Typ.)
 Third Order Two Tone Intercept Point +27 (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 1000 MHz	5 - 1000 MHz
Gain (dB)	13.5	12.0 Min.
Power @ 1 dB Comp. (dBm)	+14	+12.0 Min.
Reverse Isolation (dB)	- 16	- 15 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	<4.0	5.0 Max.
Power Vdc	+15	+15
mA	38	41 Max.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 10 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

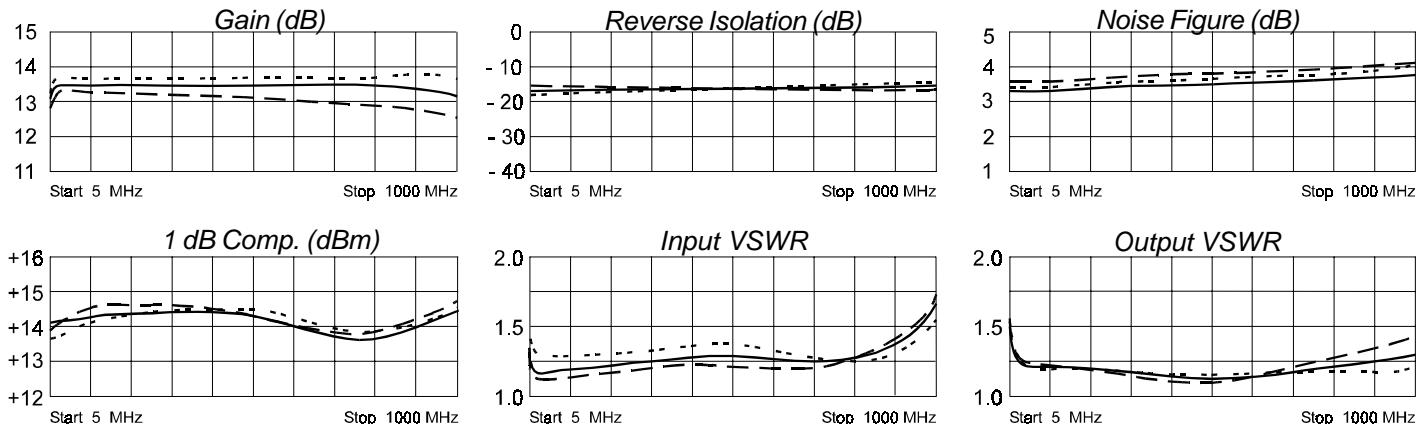

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.12	- 51	4.60	-170	.11	10	.17	144
50	.05	1	4.73	173	.11	- 1	.09	165
100	.06	18	4.72	164	.11	- 3	.08	165
200	.08	26	4.71	148	.12	- 8	.07	159
400	.14	12	4.70	115	.12	-15	.04	168
600	.16	- 25	4.65	81	.13	-25	.04	-140
800	.14	- 93	4.49	46	.13	-38	.07	-124
1000	.23	172	4.23	6	.13	-52	.14	-118



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 ···· FAX 215-464-4001 3/14/03