




1N4001 THRU 1N4007

GENERAL PURPOSE PLASTIC RECTIFIER
Reverse Voltage - 50 to 1000 Volts
Forward Current - 1.0 Ampere

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3Kg) tension

DO-41

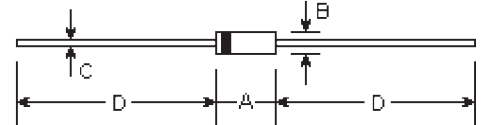

Mechanical Data

- **Case:** DO-41 molded plastic body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.012 ounce, 0.33 gram

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.165	0.205	4.2	5.2	
B	0.079	0.106	2.0	2.7	φ
C	0.028	0.034	0.71	0.86	φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0							Amp
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method) $T_A=75^\circ\text{C}$	I_{FSM}	30.0							Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	5.0 50.0							μA
Typical reverse recovery time (Note 1)	T_{rr}	2.0							μS
Typical junction capacitance (Note 2)	C_j	15.0							F
Typical thermal resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JL}$	50.0 25.0							$^\circ\text{C/W}$
Maximum DC blocking voltage temperature	T_A	+150							$^\circ\text{C}$
Operating junction and storage temperature range	T_J, T_{STG}	-50 to +175							$^\circ\text{C}$

Notes:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_F=0.25\text{A}$

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts

(3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES

