

---

# 4AM11

Silicon N-Channel/P-Channel Power MOS FET Array

# HITACHI

---

## Application


High speed power switching

## Features

- Low on-resistance  
N-channel:  $R_{DS(on)} = 0.17 \Omega$ ,  $V_{GS} = 10 \text{ V}$ ,  $I_D = 2.5 \text{ A}$   
P-channel:  $R_{DS(on)} = 0.2 \Omega$ ,  $V_{GS} = -10 \text{ V}$ ,  $I_D = -2.5 \text{ A}$
- Capable of 4 V gate drive
- Low drive current
- High speed switching
- High density mounting
- Suitable for H-bridged motor driver

# 4AM11

## Outline

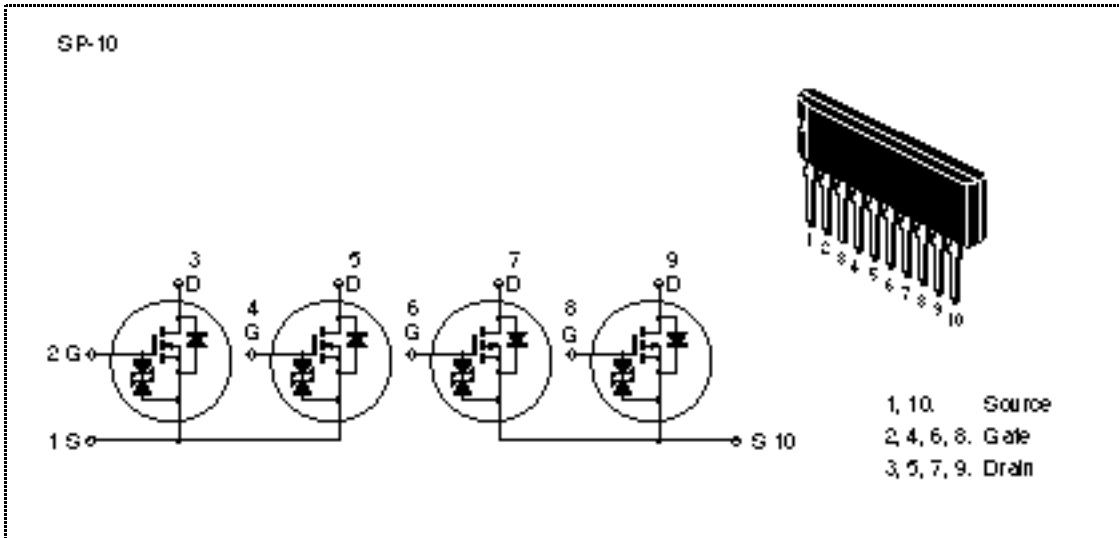

### Absolute Maximum Ratings (Ta = 25°C) (1 Unit)

Item	Symbol	Rating		Unit
		Nch	Pch	
Drain to source voltage	$V_{DSS}$	60	-60	V
Gate to source voltage	$V_{GSS}$	$\pm 20$	$\pm 20$	V
Drain current	$I_D$	5	-5	A
Drain peak current	$I_{D(pulse)}^{*1}$	20	-20	A
Body to drain diode reverse drain current	$I_{DR}$	5	-5	A
Channel dissipation	$P_{ch} (T_c = 25^\circ C)^{*2}$	28		W
Channel dissipation	$P_{ch}^{*2}$	4		W
Channel temperature	$T_{ch}$	150		°C
Storage temperature	$T_{stg}$	-55 to +150		°C

Notes: 1. PW 10  $\mu s$ , duty cycle 1%

2. 4 Devices operation


# HITACHI






## Electrical Characteristics (Ta = 25°C) (1 Unit)

Item	Symbol	N channel			P channel			Unit	Test conditions
		Min	Typ	Max	Min	Typ	Max		
Drain to source breakdown voltage	$V_{(BR)DS}$ S	60	—	—	-60	—	—	V	$I_D = 10 \text{ mA}, V_{GS} = 0$
Gate to source breakdown voltage	$V_{(BR)GS}$ S	$\pm 20$	—	—	$\pm 20$	—	—	V	$I_G = \pm 100 \text{ }\mu\text{A}, V_{DS} = 0$
Gate to source leak current	$I_{GSS}$	—	—	$\pm 10$	—	—	$\pm 10$	$\mu\text{A}$	$V_{GS} = \pm 16 \text{ V}, V_{DS} = 0$
Zero gate voltage drain current	$I_{DSS}$	—	—	250	—	—	-250	$\mu\text{A}$	$V_{DS} = 50 \text{ V}, V_{GS} = 0$
Gate to source cutoff voltage	$V_{GS(off)}$	1.0	—	2.0	-1.0	—	-2.0	V	$I_D = 1 \text{ mA}, V_{DS} = 10 \text{ V}$
Static drain to source on state resistance	$R_{DS(on)}$	—	0.13	0.17	—	0.15	0.2		$I_D = 2.5 \text{ A},$ $V_{GS} = 10 \text{ V}^{*1}$
		—	0.18	0.24	—	0.20	0.27		$I_D = 2.5 \text{ A}, V_{GS} = 4 \text{ V}^{*1}$
Forward transfer admittance	$ y_{fs} $	2.7	4.5	—	2.7	5.0	—	S	$I_D = 2.5 \text{ A},$ $V_{DS} = 10 \text{ V}^{*1}$
Input capacitance	$C_{iss}$	—	400	—	—	900	—	pF	$V_{DS} = 10 \text{ V}, V_{GS} = 0,$
Output capacitance	$C_{oss}$	—	220	—	—	460	—	pF	$f = 1 \text{ MHz}$
Reverse transfer capacitance	$C_{rss}$	—	60	—	—	130	—	pF	
Turn-on delay time	$t_{d(on)}$	—	5	—	—	8	—	ns	$I_D = 2.5 \text{ A}, V_{GS} = 10 \text{ V},$
Rise time	$t_r$	—	30	—	—	35	—	ns	$R_L = 12$
Turn-off delay time	$t_{d(off)}$	—	170	—	—	180	—	ns	
Fall time	$t_f$	—	75	—	—	85	—	ns	
Body to drain diode forward voltage	$V_{DF}$	—	1.0	—	—	-1.0	—	V	$I_F = 5 \text{ A}, V_{GS} = 0$
Body to drain diode reverse recovery time	$t_{rr}$	—	100	—	—	170	—	$\mu\text{s}$	$I_F = 5 \text{ A}, V_{GS} = 0,$ $dI_F/dt = 50 \text{ A}/\mu\text{s}$


Note: 1. Pulse Test






Polarity of test conditions for P channel device is reversed.

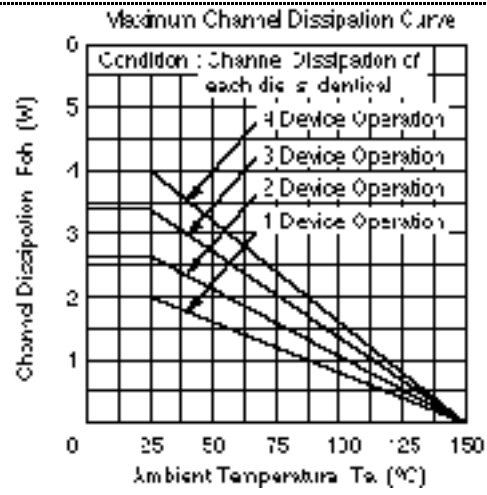


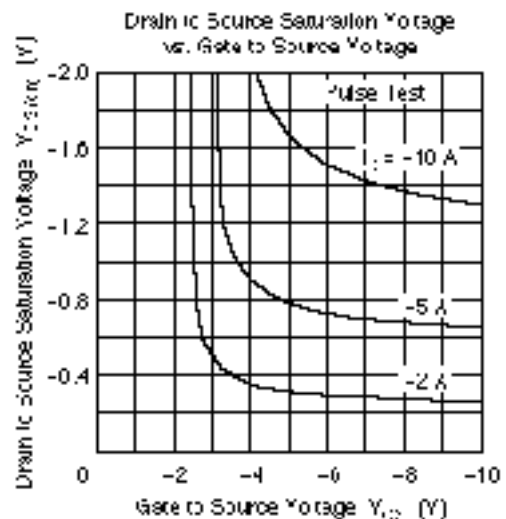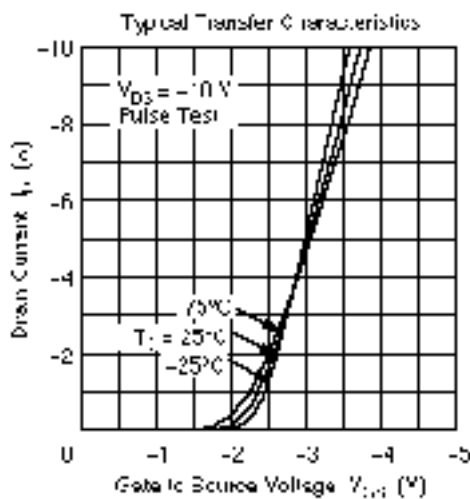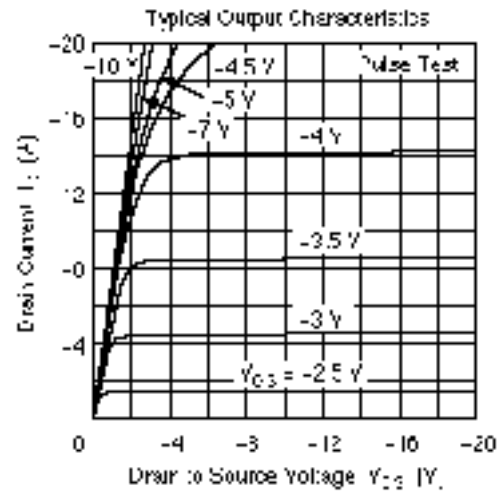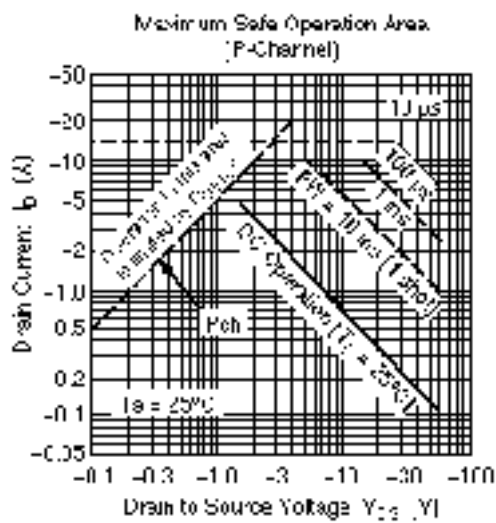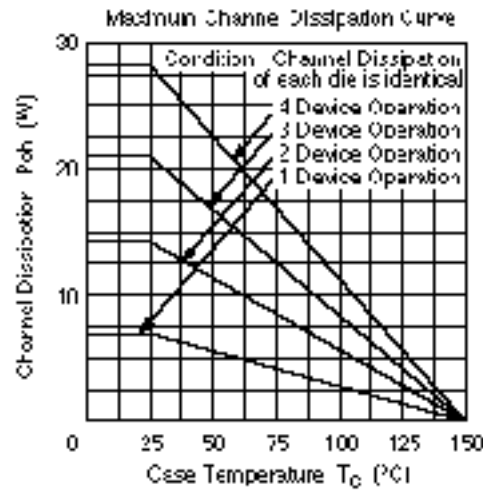

**HITACHI**

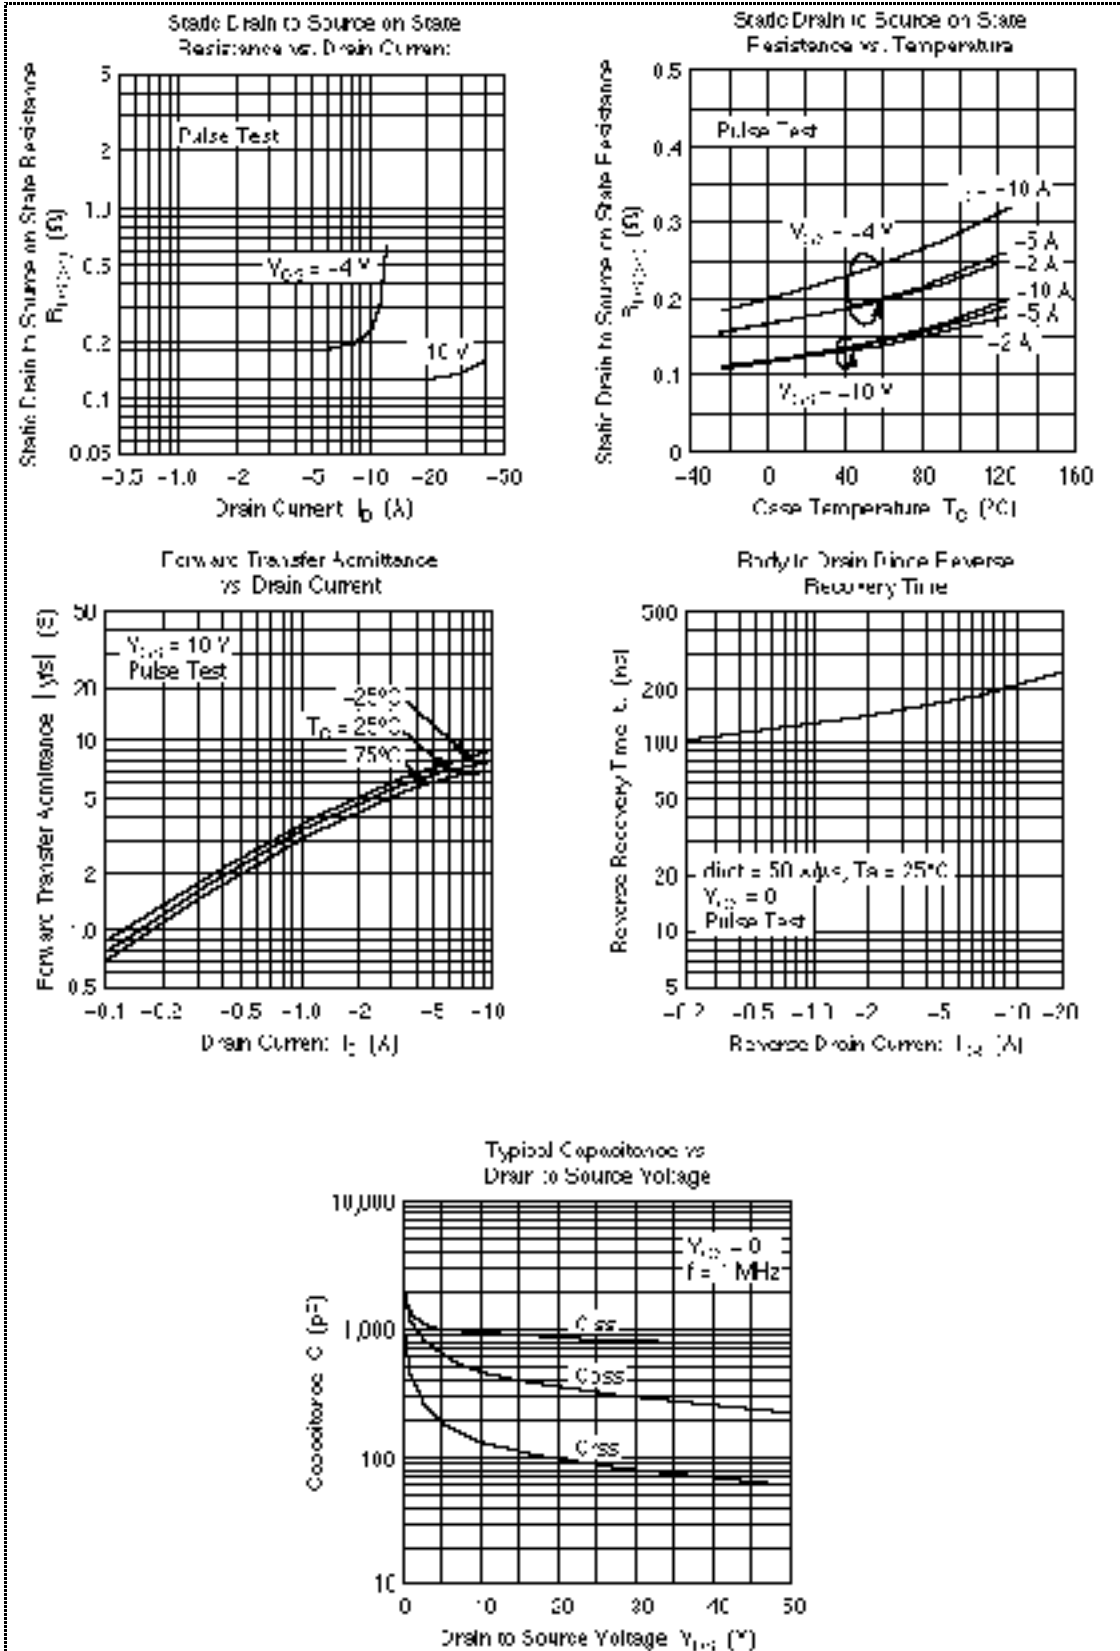


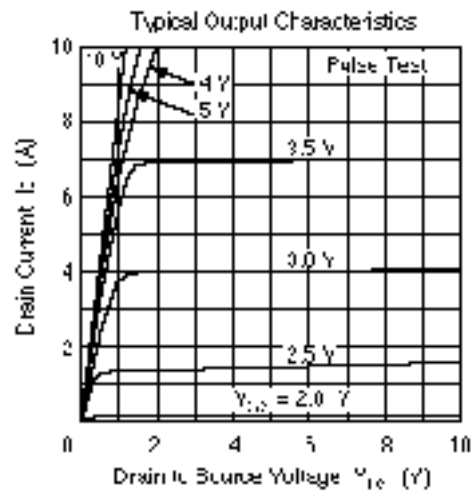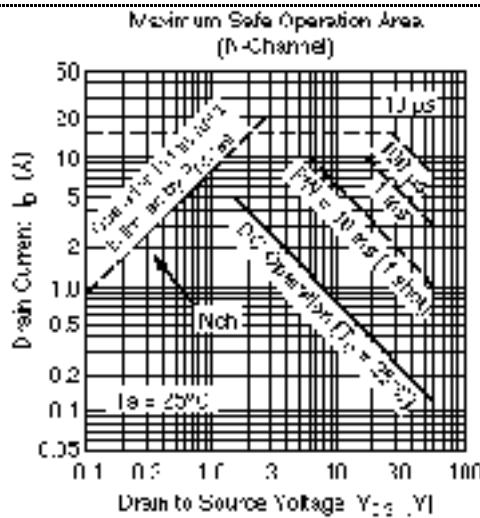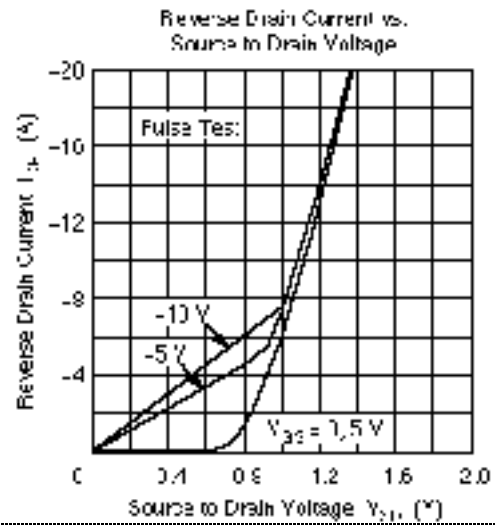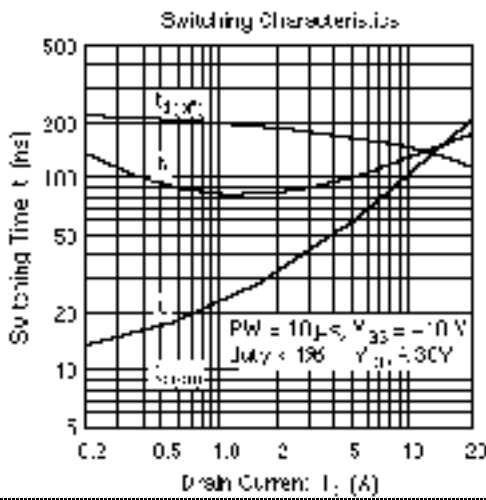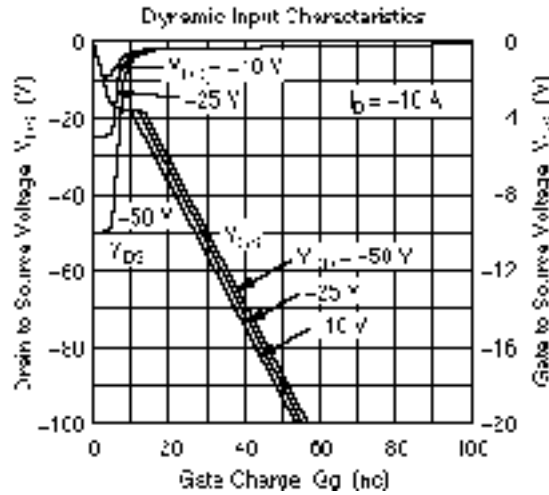

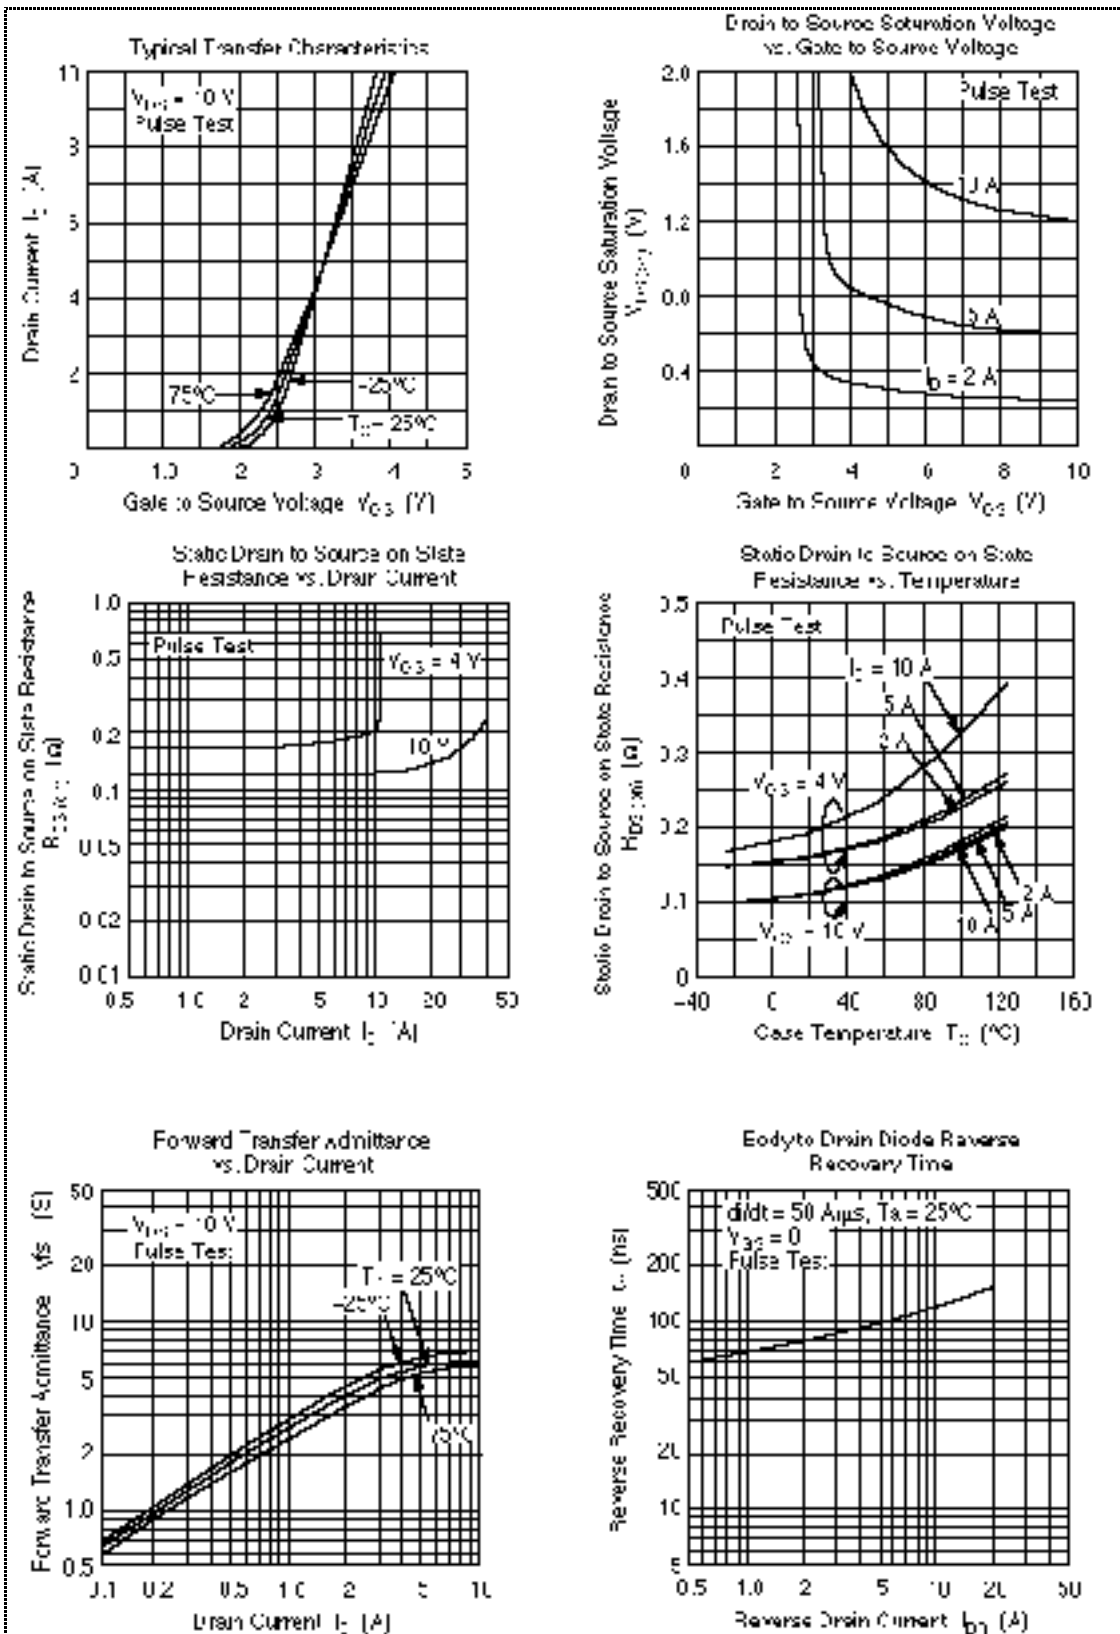

**HITACHI**



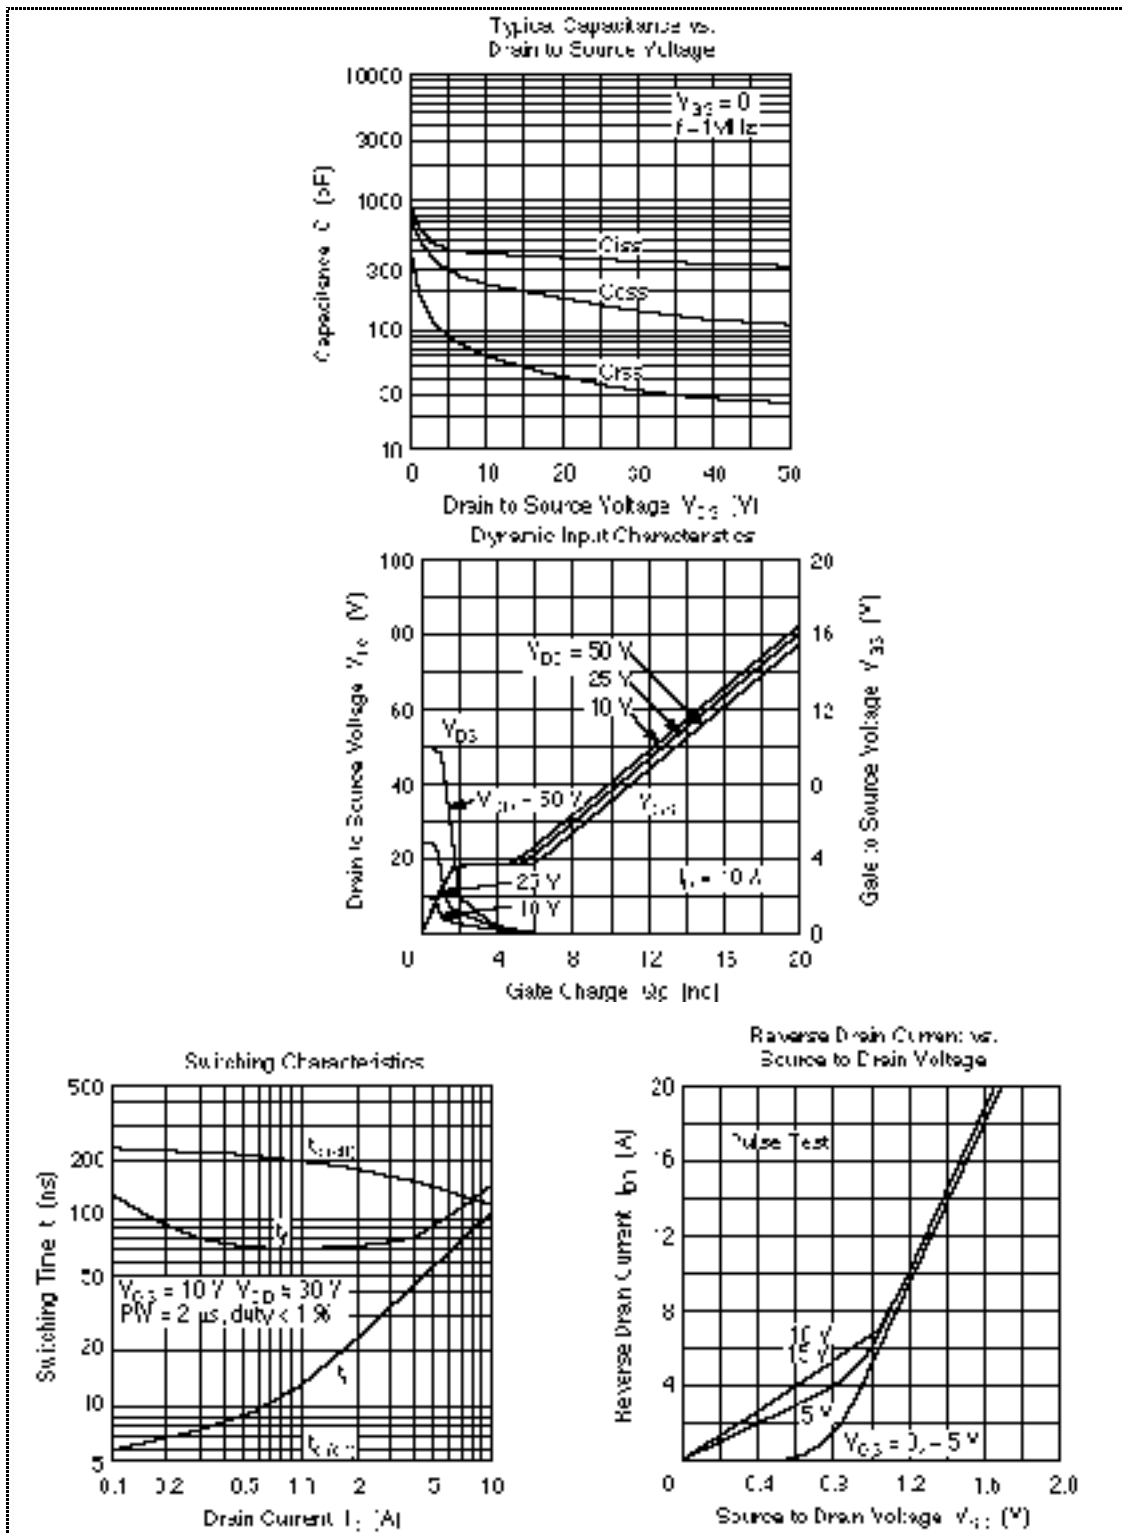

**HITACHI**

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

---

# HITACHI

## Hitachi, Ltd.

Semiconductor & IC Div.

Nippon Bldg., 2-5-2, Ohite-machi, Chiyoda-ku, Tokyo 100, Japan

Tel: Tokyo (03) 3270-2111

Fax: (03) 3270-5109

For further information write to:

Hitachi America, Ltd.

Semiconductor & IC Div.

2000 Sierra Point Parkway

Brisbane, CA 94005-4935

U.S.A.

Tel: 415-589-8000

Fax: 415-589-4207

Hitachi Europe GmbH

Electronic Components Group

Continental Europe

Danrecher Straße 3

D-85622 Feldkirchen

München

Tel: 089-9 24 80-0

Fax: 089-9 29 30 00

Hitachi Europe Ltd.

Electronic Components Div.

Northern Europe Headquarters

Whitebrook Park

Lower Cookham Road

Widenhead

Berkshire SL6 8YA

United Kingdom

Tel: 0628-585000

Fax: 0628-778322

Hitachi Asia Pte. Ltd.

45 Collyer Quay #20-00

Hitachi Tower

Singapore 0104

Tel: 535-2100

Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.

Unit 705, North Tower,

World Finance Centre

Harbour City, Canton Road

Tsim Sha Tsui, Kowloon

Hong Kong

Tel: 27359218

Fax: 27308074

# HITACHI