

Surface Mount RF Transformer

50Ω 0.2 to 150 MHz

T14-1-KK81+ T14-1-KK81



CASE STYLE: KK81
PRICE: \$4.95 ea. QTY (1-9)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

*The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.*

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	55°C to 100°C
RF Power	250mW
DC Current	30mA

Pin Connections

PRIMARY DOT	6
PRIMARY	3
SECONDARY DOT	1
SECONDARY	3
CASE EXT.	3
NOT USED	2,4,5

Features

- wideband, 0.2 to 150 MHz
- good return loss
- also available with plug-in (X65) & flat-pack (W38) leads

Applications


- impedance matching
- radio communication

Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
14	0.2-150	0.2-150	0.5-100	2-50

* Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

Outline Drawing

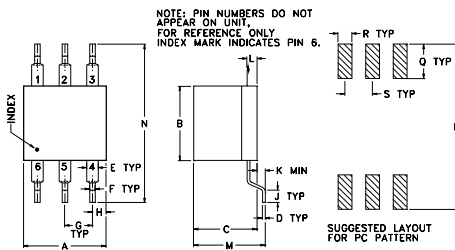


Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.30	.27	.23	.010	.042	.020	.100	.05	.05
7.62	6.86	5.84	0.25	1.07	0.51	2.54	1.27	1.27
K	L	M	N	P	Q	R	S	wt
.020	.036	.26	.575	.600	.125	.050	.100	grams
0.51	0.91	6.60	14.61	15.24	3.18	1.27	2.54	0.50

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.20	1.96	8.58
0.41	1.20	12.75
1.48	0.81	16.38
10.09	0.54	13.93
39.40	0.80	4.69
86.71	1.63	1.60
104.96	2.08	1.21
118.91	2.44	1.01
138.49	2.95	0.83
150.00	3.28	0.76

Config. D



T14-1-KK81
INSERTION LOSS

