

**T-1 (3mm) RIGHT ANGLE LED  
INDICATOR**




**SUN LED**

Email : sales@us.sunled.com

Web Site : www.sunled.com

XPV1LUG32D

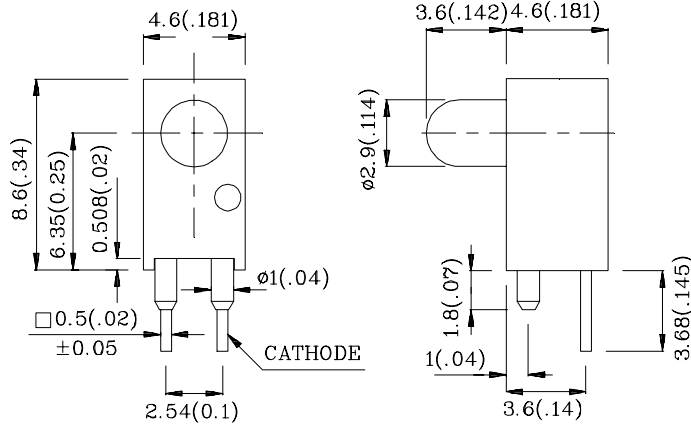

UL RATING : 94V-0.

HOUSING MATERIAL: TYPE 66 NYLON.

Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$ " unless otherwise noted.

Absolute maximum ratings ( $T_A=25^\circ\text{C}$ )		UG (GaP)	Unit
Reverse voltage	$V_R$	5	V
Forward current	$I_F$	25	mA
Forward current (peak) 1/10Duty cycle 0.1ms pulse width	$i_{FS}$	140	mA
Power dissipation	$P_T$	105	mW
Operating temperature	$T_A$	-40 ~ +85	$^\circ\text{C}$
Storage temperature	$T_{stg}$		
Lead solder temperature [2mm below package base]		260 $^\circ\text{C}$ For 5 Seconds	

Operating Characteristics ( $T_A=25^\circ\text{C}$ )		UG (GaP)	Unit
Forward voltage (typ.) ( $I_F=10\text{mA}$ )	$V_F$	2.0	V
Forward voltage (max.) ( $I_F=10\text{mA}$ )	$V_F$	2.5	V
Reverse current ( $V_R=5\text{V}$ )	$I_R$	10	$\mu\text{A}$
Wavelength at peak emission ( $I_F=10\text{mA}$ )	$\lambda_{\text{peak}}$	565	nm
Wavelength at Dominate emission ( $I_F=10\text{mA}$ )	$\lambda_D$	568	nm
Spectral Line half-width ( $I_F=10\text{mA}$ )	$\Delta\lambda$	30	nm
Capacitance ( $V_F=0\text{V}$ , $f=1\text{MHz}$ )	C	15	pF

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity ( $I_F=10\text{mA}$ ) mcd		Wavelength nm $\lambda_P$	Viewing Angle 2 $\theta$ /2
				min.	TYP.		
XPV1LUG32D	Green	GaP	Green Diffused	8	19	565	60 $^\circ$

**XPV1LUG32D**

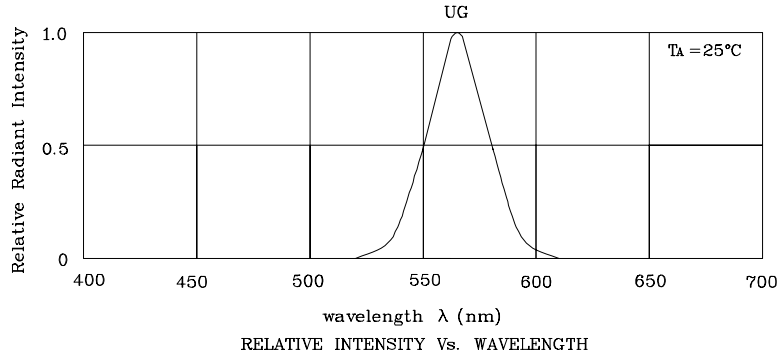

◆UG

