



QEN60AHR LQ50 @ 35.328 MHz

SMD FR4 19.9 x 9.4 mm

XO

QEN60AH
22-05-2000



Frequency: 35.328 MHz

Package Size (mm)


Features:

Operating Temperature	0°C~+50°C
Frequency Stability	±20 ppm
Ageing @ 25°C	±5 ppm max/year
Overall Stability (1)	±50 ppm


Supply voltage	+5 V ±5%
Current consumption	20 mA max.

Rise & fall time	5 ns max.
Load HCMOS/TTL-compatible	15 pF max
Duty cycle	45/55

(1) Including 25°C calibration, temperature, ageing 1 year, Vcc, load. changes

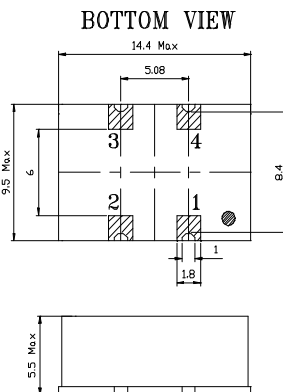

Suggested Pad



SHORT FORM Data Sheet - For more details, please contact us

SALES OFFICES:

Benelux: +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 895164-0 / **Nordic:** +46 (0) 8 59030300
France: +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340
USA: +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

WEB SITE: <http://www.temex-components.com>

E-mail: adsl@temex.fr

Specifications are subject to change without notice